

Hydrocerol™ Chemical Foaming Agents

Sustainability Spotlight



Lightweighting




CHEMICAL FOAMING AGENTS (CFAs)

are chemical substances that react under the influence of heat to release gas into the plastic matrix during the manufacturing process of plastic parts. The gases form a cellular foam structure in the plastic that reduces the amount of material needed and hence the part's weight. Therefore, they are typically used for lightweighting projects.

Hydrocerol™ Chemical Foaming Agents are supplied as concentrates and are added to virgin or recycled polymer during the plastic conversion process. They are suitable for injection molding, extrusion, and blow molding. The portfolio includes non-hazardous endothermic substances that require minimum cooling of the plastic parts after manufacturing.

In addition to weight reduction and raw material savings, Hydrocerol CFAs can provide several other benefits that include:

- thermal and acoustic insulation
- increased stiffness-to-weight ratio
- elimination of warpage and sink marks
- more efficient processing

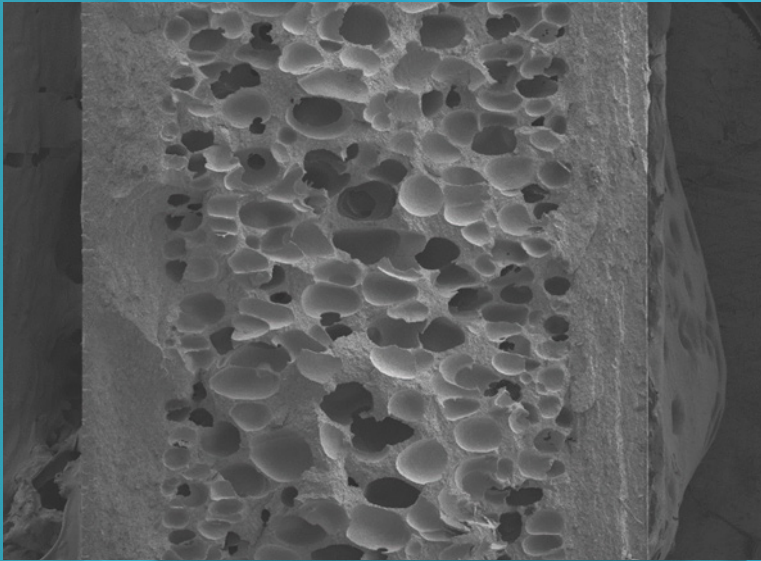

Reflection electron microscopy (REM)
view of foamed plastic



Hydrocerol Chemical Foaming Agents
are supplied as concentrates



APPLICATIONS

Automotive

Hydrocerol Chemical Foaming Agents are particularly recommended for lightweighting projects. By reducing the weight of automotive parts, they support the reduction of CO₂ emissions. Weight reductions of 10 to 20% can be achieved in injection-molded plastic components such as interior trim parts, dashboard carriers, door parts, glove boxes, and blow-molded parts such as air duct systems. Additional advantages include shorter injection molding cycle times and improved part dimensional stability. Grades are available for polyolefins, PP, PC/ABS, ABS, PA6—filled and reinforced polymers included—and others on request.



Packaging

The Hydrocerol CFAs portfolio includes grades specially developed for extruded packaging films and sheets where thermoforming characteristics of the finished article are critical. Typical applications include yogurt pots, cups, trays, and decorative ribbons. The concentrates produce an especially fine-celled foam structure that minimizes the risk of surface defects due to the thermoforming process. Weight reductions between 15 and 30% can be reached in standard monolayer and co-extruded applications. Extrusion-specific concentrates are available for most common packaging resins, including PP, PE, PS, PET, and PLA.





Durable Goods

Injection-molded durable goods can also benefit from the lightweighting effect of chemical foaming agents, especially products used in shipment and freight such as crates, boxes, and pallets, but also products such as brushes and toys. Up to 30% weight reduction can be achieved with Hydrocerol Chemical Foaming Agents in these applications. Additional advantages include shorter injection molding cycle times and improved part dimensional stability. Grades are available for polyolefins, ABS, PS, PA6, and others on request.

Building & Construction

Chemical foaming agents create an especially fine-celled foam structure in extruded goods. This cellular structure results in weight reductions of 15 to 30% in films and sheets and 20 to 40% in pipes, profiles, and boards. Grades are available for polyolefins, styrenics, PVC, PA6, and others on request.

SUPPORT

Our experts can offer product recommendations in the chemical foaming of plastics, taking into consideration:

- Manufacturing process
- Application polymer grades
- Regulatory requirements (e.g., food contact compliance, toy regulations)
- Targeted performance requirement (e.g., lightweighting, polymer use reduction, insulation, improved processing)

They also provide technical assistance and best practices for using Hydrocerol Chemical Foaming Agents in the best conditions for a successful foaming of the plastic parts.

1.844.4AVIENT
www.avient.com



Copyright © 2023, Avient Corporation. Avient makes no representations, guarantees, or warranties of any kind with respect to the information contained in this document about its accuracy, suitability for particular applications, or the results obtained or obtainable using the information. Some of the information arises from laboratory work with small-scale equipment which may not provide a reliable indication of performance or properties obtained or obtainable on larger-scale equipment. Values reported as "typical" or stated without a range do not state minimum or maximum properties; consult your sales representative for property ranges and min/max specifications. Processing conditions can cause material properties to shift from the values stated in the information. Avient makes no warranties or guarantees respecting suitability of either Avient's products or the information for your process or end-use application. You have the responsibility to conduct full-scale end-product performance testing to determine suitability in your application, and you assume all risk and liability arising from your use of the information and/or use or handling of any product. AVIENT MAKES NO WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, either with respect to the information or products reflected by the information. This literature shall NOT operate as permission, recommendation, or inducement to practice any patented invention without permission of the patent owner.