

Polymer Comparison Chart

Geon™ Rigid Vinyl Versus Other Flame-Resistant Polymers

With increased attention to product safety, the use of flame-resistant polymers for molded electrical enclosures is growing. Some polymers like vinyl are inherently flame-resistant, while other polymers require additives to make them more flame-resistant. These additives can significantly alter the properties and performance of the base polymer.


When comparing different polymers, a design engineer should consider physical properties, processing considerations, and cost per volume. As shown in the table below, few polymers deliver the cost-performance benefit of Geon Vinyl, often making it the best choice for molded electrical applications.

FR Polymer Comparison Chart						
	Geon PVC	FR ABS	FR PC	FR PC+ABS	FR PPE+PS	FR HIPS
Physical Properties						
Tensile Strength	Good	Good	Excellent	Excellent	Good	Low
Tensile Modulus	Good	Good	Good	Good	Good	Fair
Flexural Strength	Good	Good	Excellent	Excellent	Good	Low
Flexural Modulus	Good	Good	Good	Good	Good	Good
Notched Izod Impact @73°F	Excellent	Fair	Excellent	Excellent	Good	Low
Heat Deflection Temp. @264 psi	Good	Good	Excellent	Good	Good	Good
Min Thickness for UL 94 V-0	Excellent	Excellent	Excellent	Excellent	Excellent	Excellent
Min Thickness for UL 94 5VA	Excellent	Good	Good	Good	Good	Good
Outdoor Weatherability*	Excellent	Fair	Good	Good	Good	Fair
Indoor UV Stability*	Excellent	Fair	Excellent	Good	Fair	Fair
Appearance	Excellent	Good	Excellent	Good	Good	Fair
Chemical Resistance	Excellent	Good	Fair	Fair	Good	Good
Specific Gravity	1.33	1.19	1.21	1.19	1.13	1.16
Processing Considerations						
Melt Temperature Range (°F)	390-410	400-450	590-630	430-520	480-530	410-450
Processing Window	Narrow	Broad	Broad	Broad	Broad	Broad
Drying Conditions	None	2-4 hrs @180°F	3-4 hrs @180°F	3-4 hrs @175°F	3-4 hrs @180°F	None
Tooling Steel	Stainless Steel	P-20 Tool Steel	P-20 Tool Steel	P-20 Tool Steel	P-20 Tool Steel	P-20 Tool Steel
Plate Out	None	Yes	Yes	Yes	Yes	Yes
Mold Shrinkage (inch per inch)	0.002-0.005	0.005-0.007	0.005-0.007	0.004-0.006	0.005-0.007	0.004-0.007
Estimated Cost per Volume						
Cost (¢/cu in)	5.38	6.45	7.87	7.31	5.72	5.24

* with appropriate UV protection additives

Vinyl in the Value Chain

Vinyl compounds are an excellent alternative to engineered thermoplastics which may be over-engineered for the necessities of end-use or where polyolefins lack the physical properties required by the end-use. Vinyl compounds are also ideally suited to replace metal where design changes allow part consolidation and where corrosion resistance is a concern. The core characteristics of vinyl, such as inherent flame resistance, weatherability, and relatively low energy consumption, are combined with a wide array of performance enhancing possibilities to make vinyl a solid economic and environmental choice.

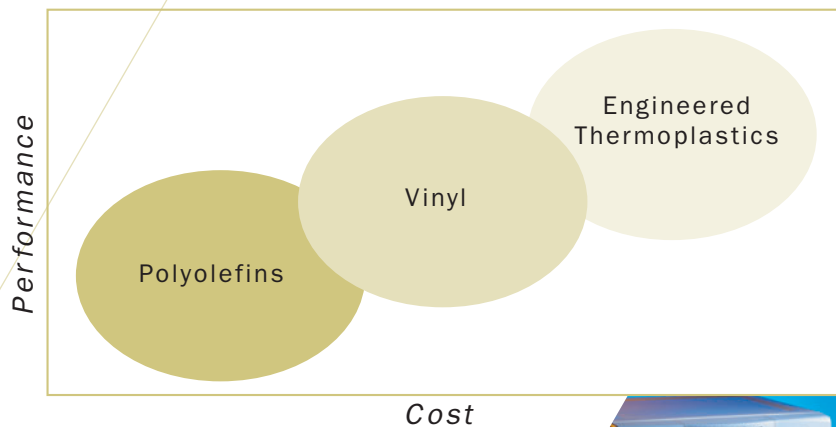

Product choices often vary by region due to differences in regulatory and agency requirements, availability, and other key factors. Please contact your nearest sales office for assistance in choosing the right solution for your locale.

CONTACT INFORMATION

Americas

U.S. – Avon Lake, Ohio
+1 866 POLYONE
Canada – St Remi
+1 450 454 5498

Asia

China – DongGuan
+86 (0) 769 8587 8800
Japan – Tokyo
+81 3 6912 9102

PolyOne[™]

*Beyond Polymers.
Better Business Solutions.SM*

www.polyone.com

PolyOne Americas

33587 Walker Road
Avon Lake, Ohio 44012
United States
+1 440 930 1000
1 866 POLYONE

PolyOne Asia

Guoshoujing Road No. 88
Z.J Hi-Tech Park, Pudong
Shanghai, 201203, China
+86 (0) 21 5080 1188

PolyOne Europe

6, Giällewee
L-9749 Fischbach
Luxembourg
+32 (0) 83 660 211

Copyright © 2009, PolyOne Corporation. PolyOne makes no representations, guarantees, or warranties of any kind with respect to the Information contained in this document about its accuracy, suitability for particular applications, or the results obtained or obtainable using the information. Some of the Information arises from laboratory work with small-scale equipment which may not provide a reliable indication of performance or properties obtained or obtainable on larger-scale equipment. Values reported as “typical” or stated without a range do not state minimum or maximum properties; consult your sales representative for property ranges and min/max specifications. Processing conditions can cause material properties to shift from the values stated in the Information. PolyOne makes no warranties or guarantees respecting suitability of either PolyOne’s products or the Information for your process or end-use application. You have the responsibility to conduct full-scale end-product performance testing to determine suitability in your application, and you assume all risk and liability arising from your use of the Information and/or use or handling of any product. POLYONE MAKES NO WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, either with respect to the Information or products reflected by the Information. This literature shall NOT operate as permission, recommendation, or inducement to practice any patented invention without permission of the patent owner.