



**CELEBRATE  
THE WORLD  
THROUGH  
COLOR**

**COLORANT  
CHROMATICS  
CATALOG**

# THE COLORFUL WORLD OF HIGH TEMPERATURE THERMOPLASTICS

High temperature polymers deliver outstanding physical properties to critical applications in many industries. By applying our technology and experience, we can help you to enhance these materials with color, additives and fibers.

We use our proven expertise in formulating high temperature thermoplastics to create formulations based on materials that include:

- PEEK
- PEI
- PES
- PPSU
- PSU
- LCP
- PPS

These specialty formulations give manufacturers confidence in the reliability and durability of their products. With the help of select colorants, fiber reinforcements and additives, we customize these polymers to meet the demanding requirements of our customers' applications.

Developing the most appropriate formulation for an application is our forte. We have helped customers develop parts that are:

- Wear resistant: End products such as bearings and sleeves that do not require lubrication

- Conductive: Electrical and/or thermal conductivity, in molded and extruded parts
- X-Ray opaque: Used for medical and dental devices. Typical applications are surgical instruments and thin walled tubing
- Brilliantly colored: Proven expertise and experience in coloring high-temperature polymers, in both transparent and translucent shades
- Laser markable (IR and UV)
- Fiber reinforced for even greater mechanical properties

What do you want to manufacture?

- Multi-use medical and dental products
- Aerospace parts
- Automotive systems
- Fuel and chemical handling equipment
- Sensors and pumps
- Home appliances

## Let's get started!

Enjoy this catalogue of colorful options for high temperature polymers. Want to know more? Contact your sales representative for information on other shades and effects.



# POLYETHER ETHERKETONE (PEEK)



EEE7340-0008




EGG7340-2440



EGG7340-2263



EEE7340-0600

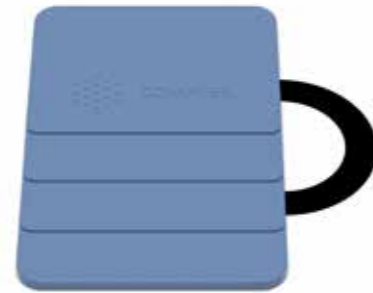


EGF7340-2626



CCC7310-0900




EGF734R-5802

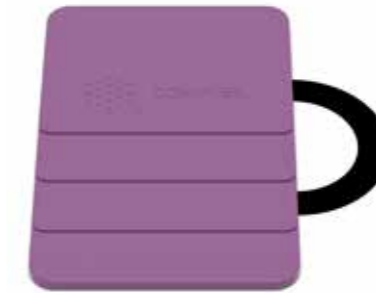

BGF7346R-4778



VR-EGF7340-66-4

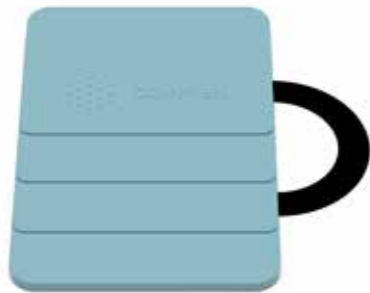

CCV7340-0860



CCC7340-0699




CCC7340-0500



EGF7340-6661



EEE7340-0819

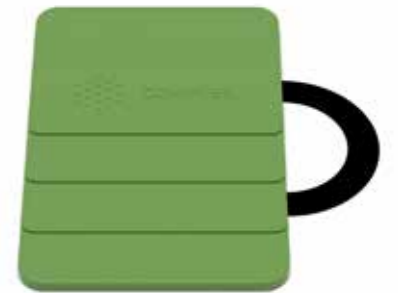

EEE7340-0451



CCC7340-0401



CCC7330-0232



CCC7340-0225



EEE7310-0225



EEE7340-0131



# POLYETHERIMIDE (PEI)



ETT8710-0060



EEE8710-0628




EEE8710-0400



EEE8710-0887



EEE8700-V001

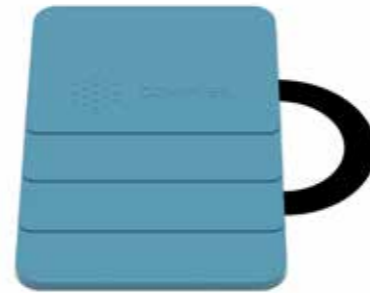

EEE8710-0668b



EEE8710-0302L



EEE8710-0300L



EEE8700R-0000



EEE8710-0474



ETT8710-0561



EEE8700-0881



ETT8710-0555



ETT8710-0320



ETT8710-0241L





# POLYETHERSULFONE (PES)



ETT6220-0240



ETT6220-0060



EEE6220R-0726



CTC6210-0402



CTC6210-0302



CTC6220-0296



EEE6220-0622




EEE6220-V500L



ETT6220-0667



VR-BEE6226-09-3

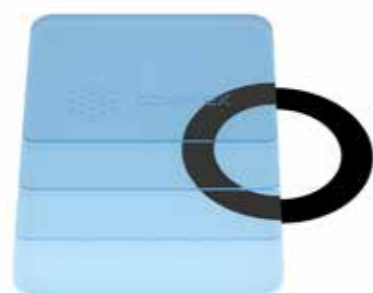

ETT6220-V001a



VR-ETT6220-06-1



VR-ETT6220-05-3




VR-ETT6220-03-2







# POLYPHENYLSULFONE (PPSU)

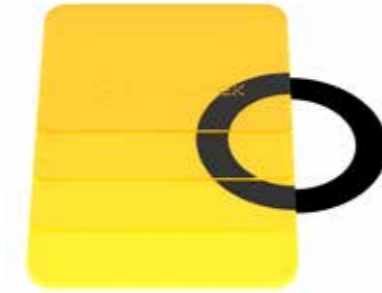


ETT6730-0303



VR-ETT6750-02-2




VR-EEE6760-09-1

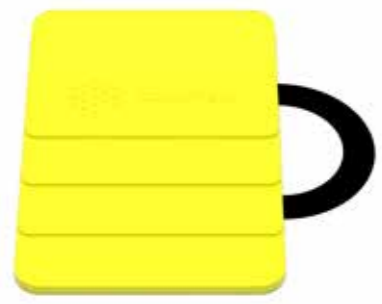

VR-EEE6750-04-5



VR-ETT6750-05-4

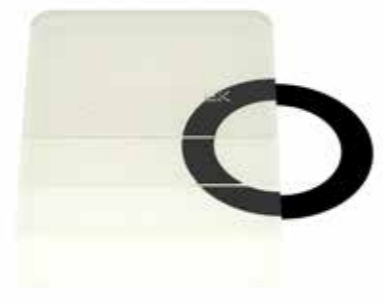

ETT6730-0830



EEE6750-0657



VR-EEE6750-04-1




VR-EEE6760R-03-2



VR-ETT6750-07-1



ETT6750-0763

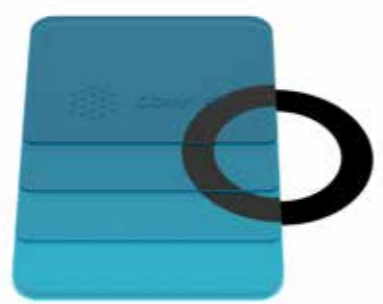

VR-ETT6750-06-4



ETT6750-0658



VR-ETT6750-05-1



VR-ETT6750-03-1





# POLYSULFONE (PSU)



ETT6511-0070



ETT6120-0301a



VR-ETT6120-02-3



EGF6511-4652a



CCV6120-0845



CCC6511-0845



ETT6511-0560



VR-CTC6511-08-5




CCC6120-0760




CCC6120-0492




ETT6511-0211

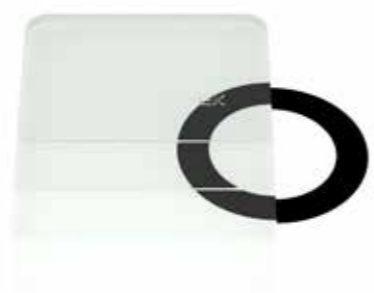

VR-ETT6511-06-6

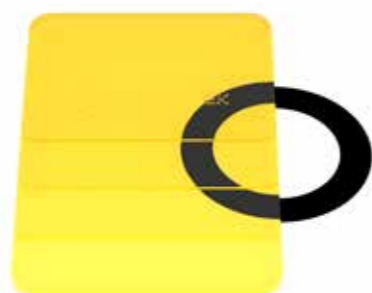

ETT6511-0402

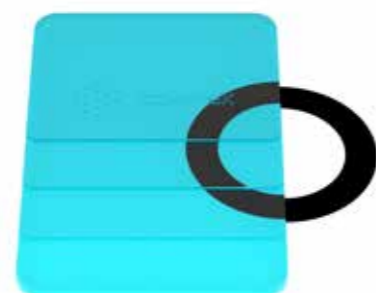

ETT6511-0601



ETT6511-0245









COMPTON

TEK



1.866.POLYONE  
[www.polyone.com](http://www.polyone.com)

*PolyOne*<sup>™</sup>

Copyright © 2017, PolyOne Corporation. PolyOne makes no representations, guarantees, or warranties of any kind with respect to the information contained in this document about its accuracy, suitability for particular applications, or the results obtained or obtainable using the information. Some of the information arises from laboratory work with small-scale equipment which may not provide a reliable indication of performance or properties obtained or obtainable on larger-scale equipment. Values reported as "typical" or stated without a range do not state minimum or maximum properties; consult your sales representative for property ranges and min/max specifications. Processing conditions can cause material properties to shift from the values stated in the information. PolyOne makes no warranties or guarantees respecting suitability of either PolyOne's products or the information for your process or end-use application. You have the responsibility to conduct full-scale end-product performance testing to determine suitability in your application, and you assume all risk and liability arising from your use of the information and/or use or handling of any product. POLYONE MAKES NO WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, either with respect to the information or products reflected by the information. This literature shall NOT operate as permission, recommendation, or inducement to practice any patented invention without permission of the patent owner.